

Kubik T2
35.06223-7916

Fixture details

Mounting	Ground
Light emission	Diffus
Fitting cover	Opal diffuser
Protection rate	IP 65
Housing	Aluminium
Finish	RAL 7016 anthracite textured
Certificates	CE, ISO 9001

Electric details


Protection class	I
Supply	230V
Control gear box	Current driver

Lamp details

Lamptype	LED 3000K
Wattage	15,6W
Gross luminous flux	2720
Luminaire power	17,2W
Number	1
Lifetime LED module	L80/B10 > 72000h
Color tolerance	MacAdam 3
CRI	>80

Photometric details

CIE Fluxcode	13 37 67 50 51
--------------	----------------

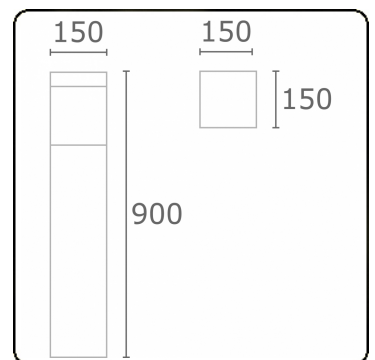

ENERGY

A ▶
B ▶ Verkrijgbaar op aanvraag.
C ▶ Disponible sur demande.
D ▶
E ▶ Available on request.
F ▶
G ▶ Auf Anfrage.

WXYZ
kWh/1000h

MULTILINE® 2019/2015