

**Metro-S Ø120mm - COB (white printed glass) - without recessed housing**  
36.010054-0021

**Fixture details**

Mounting	Ground - recessed
Light emission	Indirect
Light distribution	Symmetrical
Fitting cover	Glass
Protection rate	IP 67
Maximum load	1000 kg drive-across (excluding recessing housi
T°	<75° °
Housing	Aluminium/Stainless Steel
Finish	matt black finish RAL 9105
Certificates	CE, ISO 9001



**Electric details**


Protection class	I
Supply	230V
Control gear box	Current driver

**Lamp details**

Lamptype	LED 4000K
Wattage	5W
Gross luminous flux	477
Luminaire power	5W
Cover glass	flat - white
Number	1
Lifetime LED module	L80/B10 = 100000h
Color tolerance	MacAdam 3
CRI	80

**Photometric details**

CIE Fluxcode	0 0 0 0 8
--------------	-----------

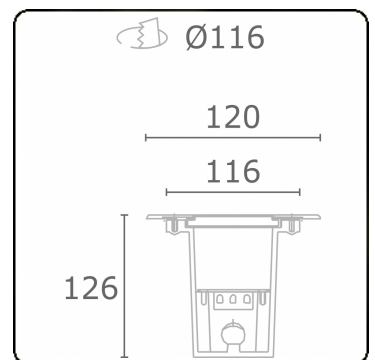

**Remarks**

Ø120mm - white printed glass

**ENERGY**

A  
B Verrijgbaar op aanvraag.  
C Disponible sur demande.  
D  
E Available on request.  
F Auf Anfrage.  
G

**WXYZ**  
kWh/1000h

**MULTILINE®** 2019/2015