

Rekta 30 SAPP - satin - HO 150mA - emergency - RAL  
07.23005524-9999

**Fixture details**

Mounting	Ceiling recessed
Light emission	Direct
Fitting cover	satin diffusor
Protection rate	IP 20
Housing	Aluminium
Finish	RAL colour at your choice
Certificates	CE, ISO 9001

**Electric details**

Protection class	I
Supply	230V
Control gear box	Current driver DALI/TD
Emergency set	Autonomy 1 hour DALI

**Lamp details**

Lamptype	LED 4000K
Wattage	3,2W
Gross luminous flux	1350
Luminaire power	7W
Number	2
Lifetime LED module	L80/B10 > 72000h
Color tolerance	MacAdam 3
CRI	>80

**Photometric details**



UGR	25,7/26,0
CIE Fluxcode	50 80 96 100 67

**Dimensions**

A	564 mm
---	--------

**Remarks**

satin LED diffuser 150mA emergency module autonomy 1 hour

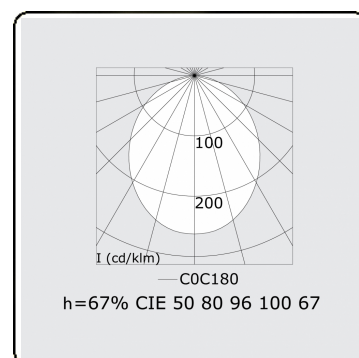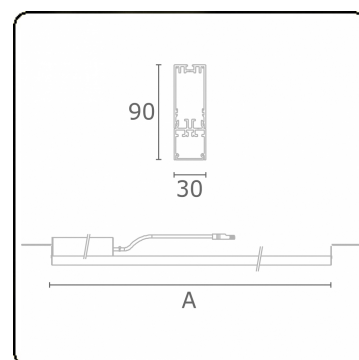

This luminaire contains built-in LED lamps.

The lamps cannot be changed in the luminaire.

**MULTILINE®**

07.23005524-9999

874/2012