

Punto - Clear - DALI - RAL 9003 / RAL 9003
05.34304004-9003

Fixture details


Mounting	3-circuit track
Light emission	Spotlight
Fitting cover	Glass
Protection rate	IP 20
Housing	Aluminium
Finish	RAL 9003 Signal white
Certificates	CE, ISO 9001

Electric details

Protection class	I
Supply	230V
Control gear box	Current driver DALI/TD

Lamp details

Lamptype	LED 4000K 50°
Wattage	20W
Luminaire power	20W
Luminaire luminous flux	1680
Number	1
Lifetime LED module	L80/B10 = 50000h
Color tolerance	MacAdam 3
CRI	>90

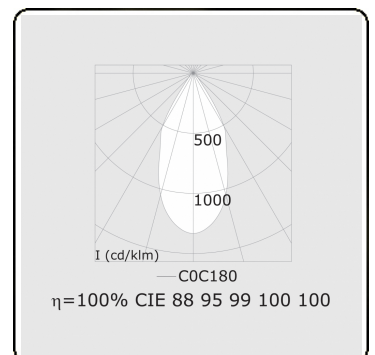

ENERGY

A
 Verkrijgbaar op aanvraag.
B
 Disponible sur demande.
C
D
 Available on request.
E
F
 Auf Anfrage.
G

WXYZ
kWh/1000h

MULTILINE® 2019/2015