

Tube 70 T1 - clear - HO 150mA - standard
35.90004524-0000

Fixture details

| | |
|-----------------|----------------|
| Mounting | Wall |
| Light emission | Direct |
| Fitting cover | clear diffuser |
| Protection rate | IP 65 |
| Housing | Polycarbonate |
| Finish | frosted |
| Certificates | CE, ISO 9001 |



Electric details

| | |
|------------------|------------------------|
| Protection class | I |
| Supply | 230V |
| Control gear box | Current driver DALI/TD |

Lamp details

| | |
|---------------------|------------------|
| Lamptype | LED 4000K |
| Wattage | 3,2W |
| Gross luminous flux | 1340 |
| Luminaire power | 7,0W |
| Number | 2 |
| Lifetime LED module | L80/B10 > 72000h |
| Color tolerance | MacAdam 3 |
| CRI | >80 |

Photometric details


| | |
|--------------|----------------|
| CIE Fluxcode | 44 73 91 88 86 |
|--------------|----------------|

Dimensions

| | |
|---|--------|
| A | 640 mm |
|---|--------|

Remarks

Wall luminaire - clear - HO 150mA - standard

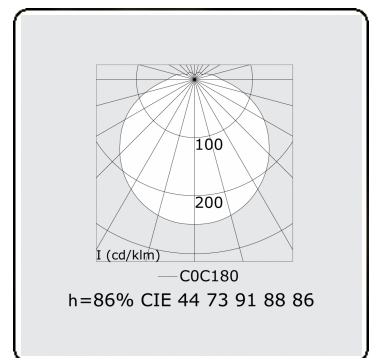

ENERGY

Verkrijgbaar op aanvraag.

Disponible sur demande.

Available on request.

Auf Anfrage.

WXYZ
kWh/1000h

MULTILINE®

2019/2015