

Rekta 65x130 Direct/Indirect - satin - HO 150mA - ANO  
06.94504544-0001

**Fixture details**

Mounting	Wall
Light emission	Direct-Indirect
Fitting cover	satin diffusor
Protection rate	IP 20
Housing	Aluminium
Finish	anodized finish
Certificates	CE, ISO 9001



**Electric details**

Protection class	I
Supply	230V
Control gear box	Current driver DALI/TD

**Lamp details**

Lamptype	LED 4000K
Wattage	3,2W
Gross luminous flux	5360
Luminaire power	28,2W
Number	8
Lifetime LED module	L80/B10 > 72000h
Color tolerance	MacAdam 3
CRI	>80

**Photometric details**



UGR	>19
CIE Fluxcode	49 80 96 100 70
CIE Fluxcode Indirect	00 00 00 00 70

**Dimensions**

A	1130 mm
---	---------

**Remarks**

Wall luminaire - Direct/Indirect - HO 150mA - satin (flush) - ANO

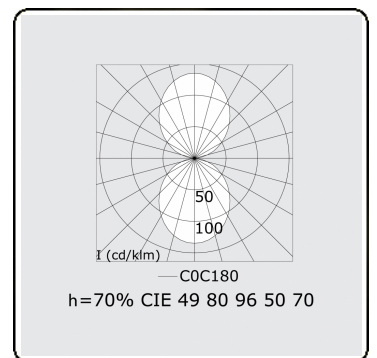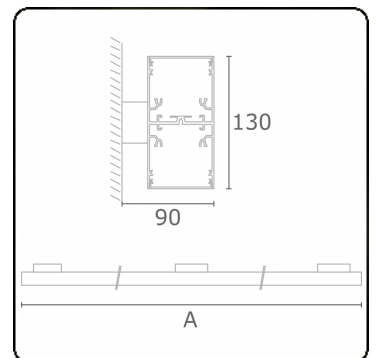

**ENERGY**

Verrijgbaar op aanvraag.

Disponible sur demande.

Available on request.

Auf Anfrage.

**WXYZ**  
kWh/1000h

**MULTILINE®**

2019/2015