

Rekta 65x130 Direct/Indirect - satin - HO 150mA - ANO
06.94504523-0001

Fixture details

| | |
|-----------------|-----------------|
| Mounting | Wall |
| Light emission | Direct-Indirect |
| Fitting cover | satin diffusor |
| Protection rate | IP 20 |
| Housing | Aluminium |
| Finish | anodized finish |
| Certificates | CE, ISO 9001 |



Electric details

| | |
|------------------|------------------------|
| Protection class | I |
| Supply | 230V |
| Control gear box | Current driver DALI/TD |

Lamp details

| | |
|---------------------|------------------|
| Lamptype | LED 3000K |
| Wattage | 3,2W |
| Gross luminous flux | 2560 |
| Luminaire power | 14,1W |
| Number | 4 |
| Lifetime LED module | L80/B10 > 72000h |
| Color tolerance | MacAdam 3 |
| CRI | >80 |

Photometric details



| | |
|-----------------------|-----------------|
| UGR | >19 |
| CIE Fluxcode | 49 80 96 100 70 |
| CIE Fluxcode Indirect | 00 00 00 00 70 |

Dimensions

| | |
|---|--------|
| A | 570 mm |
|---|--------|

Remarks

Wall luminaire - Direct/Indirect - HO 150mA - satin (flush) - ANO

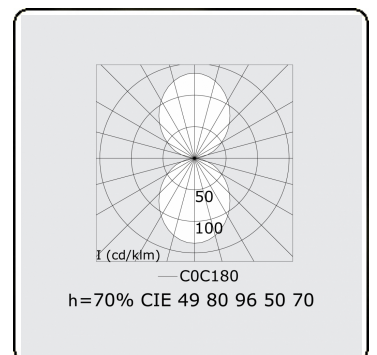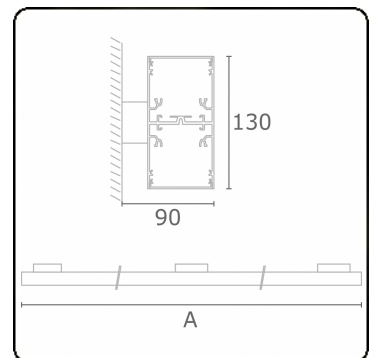

ENERGY

Verrijgbaar op aanvraag.

Disponible sur demande.

Available on request.

Auf Anfrage.

WXYZ
kWh/1000h

MULTILINE®

2019/2015