

Rekta 65x90 Direct/Indirect - VDT - HO 325mA - ANO
04.94324604-0001

Fixture details

Mounting	Pendant
Light emission	Direct-Indirect
Fitting cover	VDT louvre
Protection rate	IP 20
Housing	Aluminium
Finish	anodized finish
Certificates	CE, ISO 9001

Electric details

Protection class	I
Supply	230V
Control gear box	Current driver DALI/TD

Lamp details

Lamptype	LED 4000K
Wattage	7,1W
Gross luminous flux	25650
Luminaire power	141,5W
Number	18
Lifetime LED module	L80/B10 > 72000h
Color tolerance	MacAdam 3
CRI	>80

Photometric details


UGR	<19
CIE Fluxcode	80 99 100 100 76
CIE Fluxcode Indirect	00 00 00 00 67

Dimensions

A	2810 mm
---	---------

Remarks

Suspended luminaire - Direct/Indirect - HO 325mA - VDT - ANO

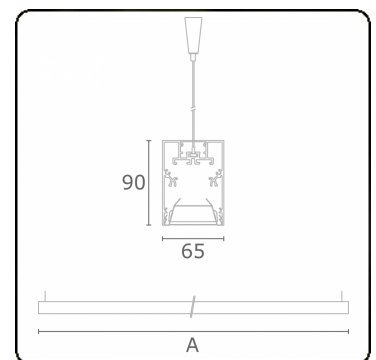



Verrijgbaar op aanvraag.

Disponible sur demande.

Available on request.

Auf Anfrage.

2019/2015



WXYZ
kWh/1000h

