

**Tube 90 - Naked module - HO 150mA - transit wired**  
35.39111554-0000

**Fixture details**

Mounting	Ceiling recessed
Light emission	Direct
Fitting cover	satin diffusor
Protection rate	IP 65
Housing	Polycarbonate
Finish	frosted
Certificates	CE, ISO 9001

**Electric details**

Protection class	I
Supply	230V
Control gear box	Current driver
Emergency set	Autonomy 1 hour

**Lamp details**

Lamptype	LED 4000K
Wattage	3,2W
Gross luminous flux	3350
Luminaire power	17,6W
Number	5
Lifetime LED module	L80/B10 > 72000h
Color tolerance	MacAdam 3
CRI	>80

**Photometric details**



CIE Fluxcode	48 78 94 100 61
--------------	-----------------

**Dimensions**

A	1410 mm
---	---------

**Remarks**

Ceiling recessed luminaire - Naked module - HO 150mA - transit wiring

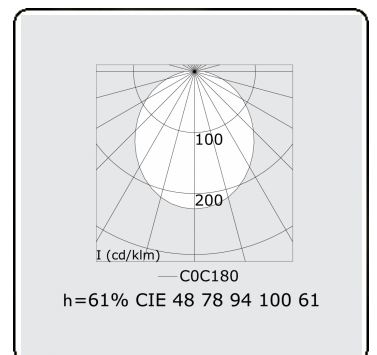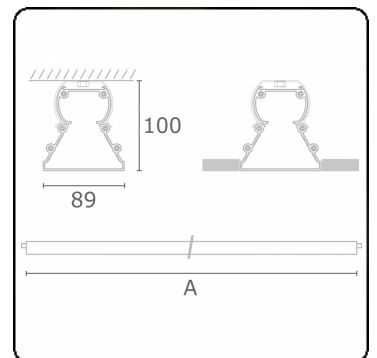

**ENERGY**

Verkrijgbaar op aanvraag.

Disponible sur demande.

Available on request.

Auf Anfrage.

**WXYZ**  
kWh/1000h

**MULTILINE®**

2019/2015