

Tube 90 - Surfaced - HO 325mA - transit wired - RAL  
35.39135643-9999

**Fixture details**

Mounting	Ceiling
Light emission	Direct
Fitting cover	satin diffusor
Protection rate	IP 65
Housing	Aluminium/Polycarbonate
Finish	RAL colour at your choice
Certificates	CE, ISO 9001



**Electric details**


Protection class	I
Supply	230V
Control gear box	Current driver DALI/TD
Emergency set	Autonomy 1 hour DALI

**Lamp details**

Lamptype	LED 3000K
Wattage	7,2W
Gross luminous flux	5120
Luminaire power	31,7W
Number	4
Lifetime LED module	L80/B10 > 72000h
Color tolerance	MacAdam 3
CRI	>80

**Photometric details**

CIE Fluxcode	48 78 94 100 61
--------------	-----------------

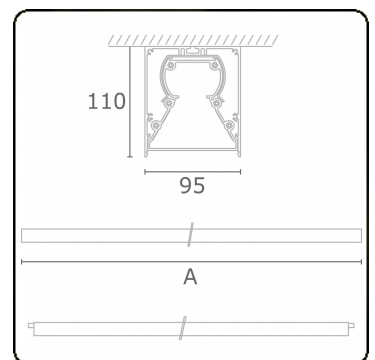

**Dimensions**

A	1584 mm
---	---------

**Remarks**

Ceiling luminaire - Surface-mounted - HO 325mA - transit wiring - RAL

**ENERGY**

Verrijgbaar op aanvraag.

Disponible sur demande.

Available on request.

Auf Anfrage.

**WXYZ**  
kWh/1000h

**MULTILINE®**

2019/2015