

Sferio Direct - MPO - LO - RAL 9005
05.36016043-9005

Fixture details

Mounting	Ceiling
Light emission	Direct
Fitting cover	micro prismatic diffuser
Protection rate	IP 20
Housing	Aluminium
Finish	RAL 9005 Jet black
Certificates	CE, ISO 9001

Electric details

Protection class	I
Supply	230V
Control gear box	Power supply touch-dim

Lamp details

Lamptype	LED 3000K
Wattage	28W
Luminaire power	28W
Luminaire luminous flux	3609
Number	1
Lifetime LED module	L80/B10 = 50000h
Color tolerance	MacAdam 3
CRI	>80

Photometric details



UGR	<19
CIE Fluxcode	60 87 97 100 100

Dimensions

A	600 mm
---	--------

Remarks

Ceiling luminaire - Direct - MPO - LO - RAL 9005

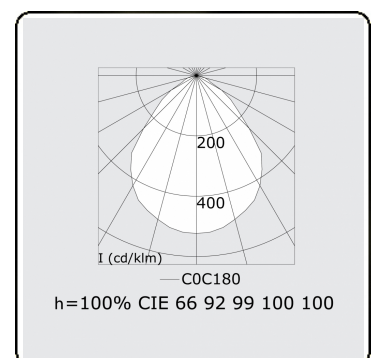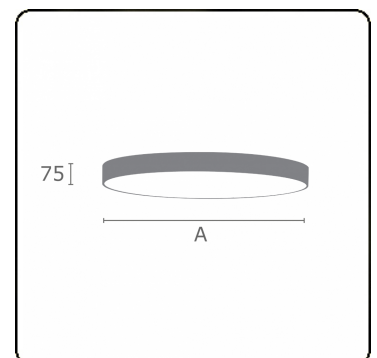

ENERGY

Verrijgbaar op aanvraag.

Disponible sur demande.

Available on request.

Auf Anfrage.

A

B

C

D

E

F

G



WXYZ
kWh/1000h

MULTILINE®

2019/2015