

Sferio Direct/Indirect - MPO - MO - RAL 9006
11.36117103-9006

Fixture details

Mounting	Ground
Light emission	Direct-Indirect
Fitting cover	micro prismatic diffuser
Protection rate	IP 20
Housing	Aluminium
Finish	RAL 9006 White aluminium
Certificates	CE, ISO 9001

Electric details

Protection class	I
Supply	230V
Control gear box	Power supply DALI - separately dimmable

Lamp details


Lamptype	LED 3000K
Wattage	88W
Luminaire power	88W
Luminaire luminous flux	11903
Lifetime LED module	L80/B10 = 50000h
Color tolerance	MacAdam 3
CRI	>80

Photometric details

UGR	<19
CIE Fluxcode	12730

Remarks

Standing luminaire - Direct/Indirect - MPO - MO - RAL 9006

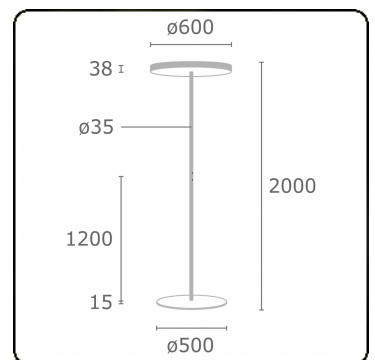

ENERGY

A
 Verkrijgbaar op aanvraag.
B
 Disponible sur demande.
C
D
 Available on request.
E
F
 Auf Anfrage.
G

WXYZ
kWh/1000h

MULTILINE® 2019/2015