

Arcoo
35.15000-7916

Fixture details

Mounting	Ground
Light emission	Diffus
Fitting cover	satin diffusor
Protection rate	IP 65
Housing	Aluminium
Finish	RAL 7016 anthracite textured
Certificates	CE, ISO 9001

Electric details


Protection class	I
Supply	230V
Control gear box	Power supply 24V DC

Lamp details

Lamptype	LED 3000K
Wattage	4,3W
Gross luminous flux	320
Luminaire power	6W
Number	1
Lifetime LED module	L70/B10 > 50000h
Color tolerance	MacAdam 4
CRI	80

Photometric details

CIE Fluxcode	42 72 90 94 58
--------------	----------------

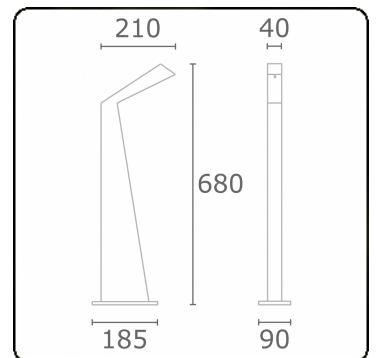

ENERGY

Verrijgbaar op aanvraag.

Disponible sur demande.

Available on request.

Auf Anfrage.

WXYZ
kWh/1000h

MULTILINE®

2019/2015