


**Annoo 3.1**  
35.16015-7916

**Fixture details**

Mounting	Wall
Light emission	Diffus
Fitting cover	satin diffusor
Protection rate	IP 65
Housing	Aluminium
Finish	RAL 7016 anthracite textured
Certificates	CE, ISO 9001

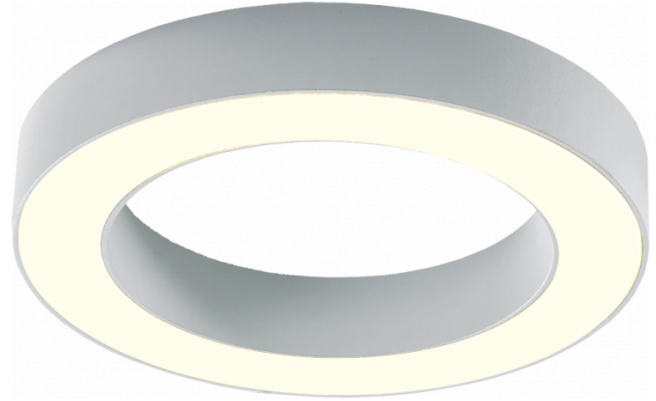

**Electric details**


Protection class	I
Supply	230V

**Lamp details**

Lamptype	LED 3000K
Wattage	10W
Luminaire power	10W
Luminaire luminous flux	460
Number	1
Lifetime LED module	L80/B10 = 50000h
Color tolerance	MacAdam 3
CRI	80

**Photometric details**

CIE Fluxcode	12 35 66 50 100
--------------	-----------------

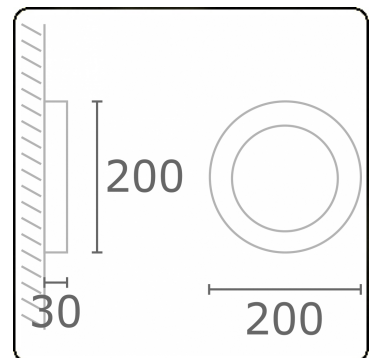

**ENERGY**

Verrijgbaar op aanvraag.

Disponible sur demande.

Available on request.

Auf Anfrage.

**WXYZ**  
kWh/1000h

**MULTILINE®** 2019/2015