

Linea
35.60729-7916

Fixture details

Light emission	Direct
Fitting cover	Glass
Protection rate	IP 65
Housing	Aluminium
Finish	RAL 7016 anthracite textured
Certificates	CE, ISO 9001

Electric details


Protection class	I
Supply	230V
Control gear box	Current driver

Lamp details

Lamptype	LED 3000K
Wattage	3W
Gross luminous flux	305
Luminaire power	6W
Number	1
Lifetime LED module	L80/B10 = 50000h
Color tolerance	MacAdam 3
CRI	85

Photometric details

CIE Fluxcode	73 94 99 100 79
--------------	-----------------

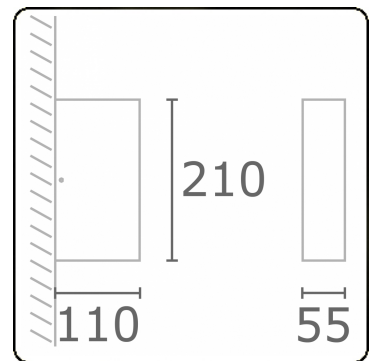

Remarks

direct or indirect light output

ENERGY

A ▶
B ▶ **Verkrijgbaar op aanvraag.**
C ▶ **Disponible sur demande.**
D ▶
E ▶ **Available on request.**
F ▶
G ▶ **Auf Anfrage.**

WXYZ
kWh/1000h

MULTILINE® 2019/2015