

**Metro-D Ø360mm - 30° ajustable - with recessed housing**  
36.07091-0000

**Fixture details**

|                    |   |
|--------------------|---|
| Mounting           | Ground - recessed                               |
| Light emission     | Indirect - adjustable                           |
| Light distribution | adjustable                                      |
| Fitting cover      | Glass   |
| Protection rate    | IP 67   |
| Maximum load       | 5000 kg drive-across (including recessing housi |
| T°                 | <75 °   |
| Housing            | Aluminium/Stainless Steel                       |
| Finish             | matt black finish RAL 9105                      |
| Certificates       | CE, ISO 9001                                    |



**Electric details**


|                  |                |
|------------------|----------------|
| Protection class | I              |
| Supply           | 230V           |
| Control gear box | Current driver |

**Lamp details**

|                     |                  |
|---------------------|------------------|
| Lamptype            | LED 3000K 32°    |
| Wattage             | 20x1W            |
| Gross luminous flux | 2520             |
| Luminaire power     | 22W              |
| Cover glass         | flat - clear     |
| Number              | 1                |
| Lifetime LED module | L70/B50 > 60000h |
| Color tolerance     | MacAdam 3        |
| CRI                 | 80               |

**Photometric details**

|              |            |
|--------------|------------|
| CIE Fluxcode | 0 0 0 0 73 |
|--------------|------------|

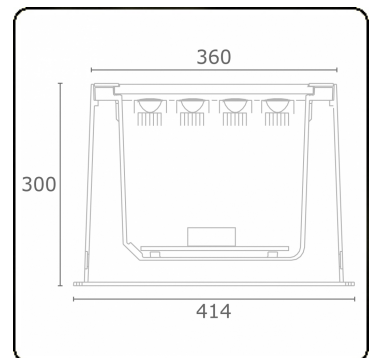

**Remarks**

Ø360mm - clear glass - strips are individually adjustable up to 30°

This luminaire contains built-in LED lamps.

The lamps cannot be changed in the luminaire.

**MULTILINE®**

36.07091-0000

874/2012