

**Nio 1**  
35.44160003-7916

**Fixture details**

Mounting	Ground
Light emission	Direct-Indirect
Fitting cover	satin diffusor - ribbed white
Protection rate	IP 65
Housing	Aluminium
Finish	RAL 7016 anthracite textured
Certificates	CE, ISO 9001

**Electric details**


Protection class	I
Supply	230V
Control gear box	Power supply 24V DC

**Lamp details**

Lamptype	LED 3000K
Wattage	11,6W
Gross luminous flux	2 x 1010
Luminaire power	25,6W
Number	2
Lifetime LED module	L70/B10 > 50000h
Color tolerance	MacAdam 3
CRI	80

**Photometric details**

CIE Fluxcode	50 80 96 100 48
CIE Fluxcode Indirect	50 80 96 100 48

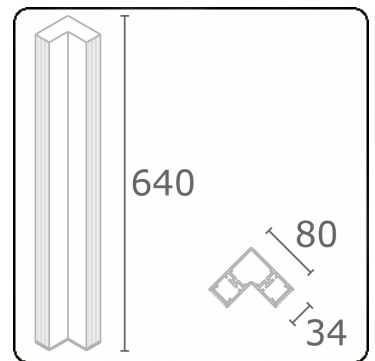

**ENERGY**

A  
 Verkrijgbaar op aanvraag.  
B  
 Disponible sur demande.  
C  
D  
 Available on request.  
E  
F  
 Auf Anfrage.  
G

**WXYZ**  
kWh/1000h

**MULTILINE®** 2019/2015