

**Annoo**  
35.16000-9906

**Fixture details**

Mounting	Ground
Light emission	Diffus
Fitting cover	satin diffusor
Protection rate	IP 65
Housing	Aluminium
Finish	RAL 9006 white aluminium textured
Certificates	CE, ISO 9001

**Electric details**



Protection class	I
Supply	230V

**Lamp details**

Lamptype	LED 3000K
Wattage	10W
Luminaire power	10W
Luminaire luminous flux	460
Number	1
Lifetime LED module	L80/B10 = 50000h
Color tolerance	MacAdam 3
CRI	80

**Photometric details**

CIE Fluxcode	12 35 66 50 100
--------------	-----------------

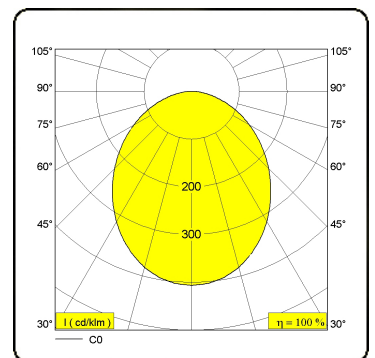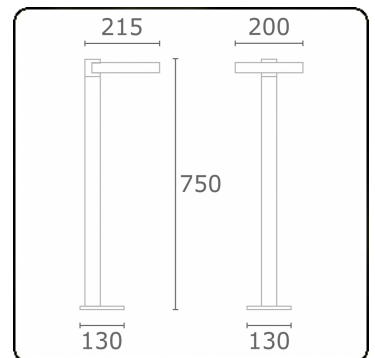

This luminaire contains built-in LED lamps.

**A++**  
**A+**  
~~A~~  
~~B~~  
~~C~~  
~~D~~  
~~E~~

The lamps cannot be changed in the luminaire.

**MULTILINE®**

35.16000-9906

874/2012