

**Annoo 1.1**  
35.16005-9905

**Fixture details**

Mounting	Wall
Light emission	Diffus
Fitting cover	satin diffusor
Protection rate	IP 65
Housing	Aluminium
Finish	RAL 9011 graphite black textured
Certificates	CE, ISO 9001



**Electric details**


Protection class	I
Supply	230V

**Lamp details**

Lamptype	LED 3000K
Wattage	10W
Luminaire power	10W
Luminaire luminous flux	460
Number	1
Lifetime LED module	L80/B10 = 50000h
Color tolerance	MacAdam 3
CRI	80

**Photometric details**

CIE Fluxcode	12 35 66 50 100
--------------	-----------------

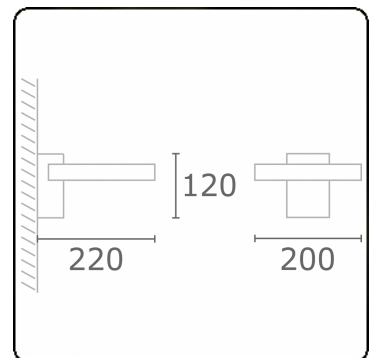

**ENERGY**

Verkrijgbaar op aanvraag.

Disponible sur demande.

Available on request.

Auf Anfrage.

**WXYZ**  
kWh/1000h

**MULTILINE®**

2019/2015