

**Artres**  
35.63919-9906

**Fixture details**

Mounting	Ground
Light emission	Direct
Fitting cover	Glass
Protection rate	IP 65
Housing	Aluminium
Finish	RAL 9006 white aluminium textured
Certificates	CE, ISO 9001

**Electric details**


Protection class	I
Supply	230V
Control gear box	Current driver

**Lamp details**

Lamptype	LED 4000K
Wattage	50W
Gross luminous flux	4350
Luminaire power	55W
Number	1
Lifetime LED module	L80/B10 = 50000h
Color tolerance	MacAdam 3
CRI	85

**Photometric details**

CIE Fluxcode	56 86 97 97 64
--------------	----------------

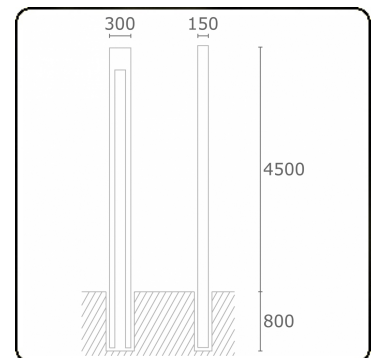

**Remarks**

Artres 4500mm - U-type - including connection door with fuse

**ENERGY**

Verkrijgbaar op aanvraag.

Disponible sur demande.

Available on request.

Auf Anfrage.

**WXYZ**  
kWh/1000h

**MULTILINE®**

2019/2015