

**Gardo-2**  
35.01294-9910

**Fixture details**

|                 |                                 |
|-----------------|---------------------------------|
| Mounting        | Ground                          |
| Light emission  | Direct                          |
| Fitting cover   | Glass                           |
| Protection rate | IP 54                           |
| Housing         | Aluminium                       |
| Finish          | RAL 9016 traffic white textured |
| Certificates    | CE, ISO 9001                    |

**Electric details**


|                  |                |
|------------------|----------------|
| Protection class | I              |
| Supply           | 230V           |
| Control gear box | Current driver |

**Lamp details**

|                     |                  |
|---------------------|------------------|
| Lamptype            | LED 4000K        |
| Wattage             | 24W              |
| Gross luminous flux | 5120             |
| Luminaire power     | 2x29W            |
| Number              | 2                |
| Lifetime LED module | L80/B10 = 50000h |
| Color tolerance     | MacAdam 3        |
| CRI                 | 85               |

**Photometric details**

|              |                |
|--------------|----------------|
| CIE Fluxcode | 53 83 97 99 73 |
|--------------|----------------|

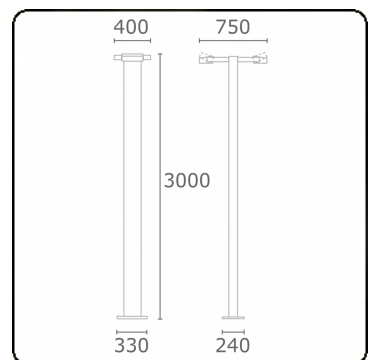

**Remarks**

including connection door with fuse - TC-D and LED with sandblasted glass, other light sources with clear glass

**ENERGY**

Verrijgbaar op aanvraag.

Disponible sur demande.

Available on request.

Auf Anfrage.

**WXYZ**  
kWh/1000h

**MULTILINE®**

2019/2015