

**Linea**  
35.60729-9910

**Fixture details**

Light emission	Direct
Fitting cover	Glass
Protection rate	IP 65
Housing	Aluminium
Finish	RAL 9016 traffic white textured
Certificates	CE, ISO 9001

**Electric details**


Protection class	I
Supply	230V
Control gear box	Current driver

**Lamp details**

Lamptype	LED 3000K
Wattage	3W
Gross luminous flux	305
Luminaire power	6W
Number	1
Lifetime LED module	L80/B10 = 50000h
Color tolerance	MacAdam 3
CRI	85

**Photometric details**

CIE Fluxcode	73 94 99 100 79
--------------	-----------------

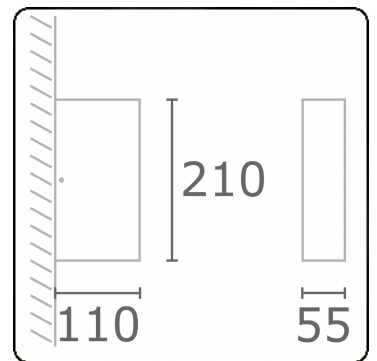

**Remarks**

direct or indirect light output

**ENERGY**

A ▶  
B ▶ Verkrijgbaar op aanvraag.  
C ▶ Disponible sur demande.  
D ▶  
E ▶ Available on request.  
F ▶ Auf Anfrage.  
G ▶

**WXYZ**  
kWh/1000h

**MULTILINE®** 2019/2015