

Linea
35.60739-9905

Fixture details

Light emission	Direct-Indirect
Fitting cover	Glass
Protection rate	IP 65
Housing	Aluminium
Finish	RAL 9011 graphite black textured
Certificates	CE, ISO 9001



Electric details


Protection class	I
Supply	230V
Control gear box	Current driver

Lamp details

Lamptype	LED 3000K
Wattage	3W
Gross luminous flux	610
Luminaire power	11W
Number	2
Lifetime LED module	L80/B10 = 50000h
Color tolerance	MacAdam 3
CRI	85

Photometric details

CIE Fluxcode	73 94 99 50 79
--------------	----------------

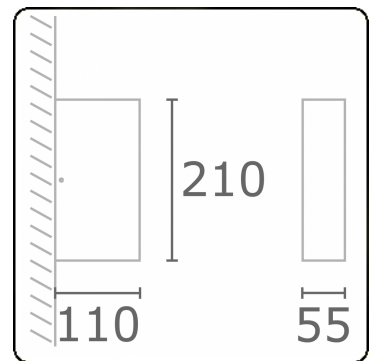

Remarks

direct/indirect light distribution

ENERGY

A ▶
B ▶ Verkrijgbaar op aanvraag.
C ▶ Disponible sur demande.
D ▶
E ▶ Available on request.
F ▶ Auf Anfrage.
G ▶

WXYZ
kWh/1000h

MULTILINE® 2019/2015