

Linea  
35.60739-9906

**Fixture details**

Light emission	Direct-Indirect
Fitting cover	Glass
Protection rate	IP 65
Housing	Aluminium
Finish	RAL 9006 white aluminium textured
Certificates	CE, ISO 9001



**Electric details**



Protection class	I
Supply	230V
Control gear box	Current driver

**Lamp details**

Lamptype	LED 3000K
Wattage	3W
Gross luminous flux	610
Luminaire power	11W
Number	2
Lifetime LED module	L80/B10 = 50000h
Color tolerance	MacAdam 3
CRI	85

**Photometric details**

CIE Fluxcode	73 94 99 50 79
--------------	----------------

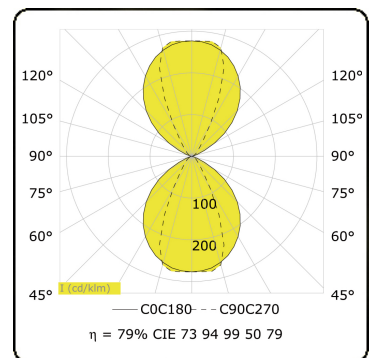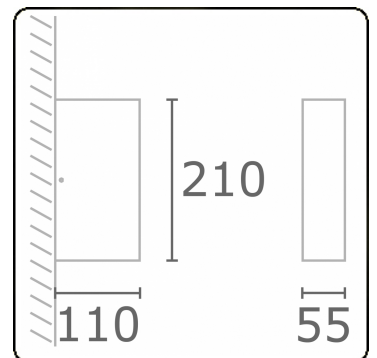

**Remarks**

direct/indirect light distribution

This luminaire contains built-in LED lamps.

LED

The lamps cannot be changed in the luminaire.

**MULTILINE®**

35.60739-9906

874/2012