

Nio 1
35.44160003-9906

Fixture details

Mounting	Ground
Light emission	Direct-Indirect
Fitting cover	satin diffusor - ribbed white
Protection rate	IP 65
Housing	Aluminium
Finish	RAL 9006 white aluminium textured
Certificates	CE, ISO 9001

Electric details


Protection class	I
Supply	230V
Control gear box	Power supply 24V DC

Lamp details

Lamptype	LED 3000K
Wattage	11,6W
Gross luminous flux	2 x 1010
Luminaire power	25,6W
Number	2
Lifetime LED module	L70/B10 > 50000h
Color tolerance	MacAdam 3
CRI	80

Photometric details

CIE Fluxcode	50 80 96 100 48
CIE Fluxcode Indirect	50 80 96 100 48

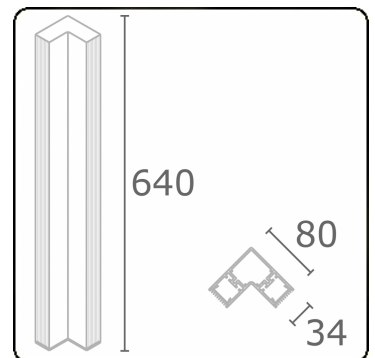

ENERGY

Verrijgbaar op aanvraag.

Disponible sur demande.

Available on request.

Auf Anfrage.

WXYZ
kWh/1000h

MULTILINE®

2019/2015