

**Nio 1**  
35.44160003-9910

**Fixture details**

|                 |                                 |
|-----------------|---------------------------------|
| Mounting        | Ground                          |
| Light emission  | Direct-Indirect                 |
| Fitting cover   | satin diffusor - ribbed white   |
| Protection rate | IP 65                           |
| Housing         | Aluminium                       |
| Finish          | RAL 9016 traffic white textured |
| Certificates    | CE, ISO 9001                    |

**Electric details**


|                  |                     |
|------------------|---------------------|
| Protection class | I                   |
| Supply           | 230V                |
| Control gear box | Power supply 24V DC |

**Lamp details**

|                     |                  |
|---------------------|------------------|
| Lamptype            | LED 3000K        |
| Wattage             | 11,6W            |
| Gross luminous flux | 2 x 1010         |
| Luminaire power     | 25,6W            |
| Number              | 2                |
| Lifetime LED module | L70/B10 > 50000h |
| Color tolerance     | MacAdam 3        |
| CRI                 | 80               |

**Photometric details**

|                       |                 |
|-----------------------|-----------------|
| CIE Fluxcode          | 50 80 96 100 48 |
| CIE Fluxcode Indirect | 50 80 96 100 48 |

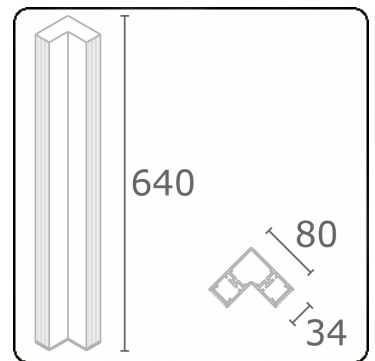

**ENERGY**

Verrijgbaar op aanvraag.

Disponible sur demande.

Available on request.

Auf Anfrage.

**WXYZ**  
kWh/1000h

**MULTILINE®**

2019/2015