

Kubik T2  
35.06204-9905

**Fixture details**

Mounting	Ground
Light emission	Diffus
Fitting cover	Opal diffuser
Protection rate	IP 65
Housing	Aluminium
Finish	RAL 9011 graphite black textured
Certificates	CE, ISO 9001



**Electric details**


Protection class	I
Supply	230V
Control gear box	Current driver

**Lamp details**

Lamptype	LED 4000K
Wattage	8W
Gross luminous flux	1420
Luminaire power	8,8W
Number	1
Lifetime LED module	L80/B10 > 72000h
Color tolerance	MacAdam 3
CRI	>80

**Photometric details**

CIE Fluxcode	13 37 67 50 51
--------------	----------------

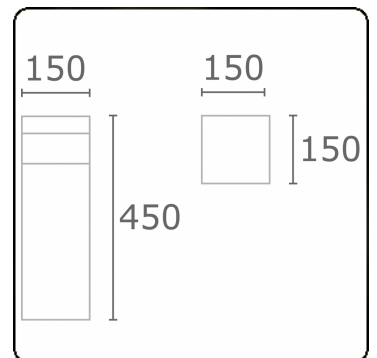

**ENERGY**

A ▶  
 Verkrijgbaar op aanvraag.  
B ▶  
 Disponible sur demande.  
C ▶  
D ▶  
 Available on request.  
E ▶  
F ▶  
 Auf Anfrage.  
G ▶

**WXYZ**  
kWh/1000h

**MULTILINE®** 2019/2015