

Kubik T2  
35.06223-9905

**Fixture details**

Mounting	Ground
Light emission	Diffus
Fitting cover	Opal diffuser
Protection rate	IP 65
Housing	Aluminium
Finish	RAL 9011 graphite black textured
Certificates	CE, ISO 9001

**Electric details**


Protection class	I
Supply	230V
Control gear box	Current driver

**Lamp details**

Lamptype	LED 3000K
Wattage	15,6W
Gross luminous flux	2720
Luminaire power	17,2W
Number	1
Lifetime LED module	L80/B10 > 72000h
Color tolerance	MacAdam 3
CRI	>80

**Photometric details**

CIE Fluxcode	13 37 67 50 51
--------------	----------------

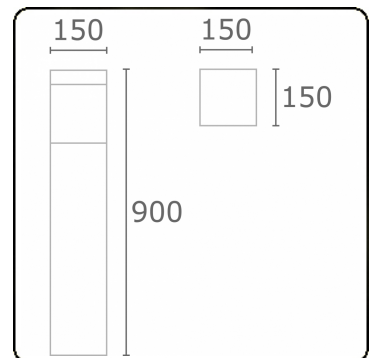

**ENERGY**

A →  
B → Verrijgbaar op aanvraag.  
C → Disponible sur demande.  
D → Available on request.  
E →  
F → Auf Anfrage.  
G →

**WXYZ**  
kWh/1000h

**MULTILINE®** 2019/2015