

**Kubik T2**  
35.06224-9905

**Fixture details**

Mounting	Ground
Light emission	Diffus
Fitting cover	Opal diffuser
Protection rate	IP 65
Housing	Aluminium
Finish	RAL 9011 graphite black textured
Certificates	CE, ISO 9001

**Electric details**


Protection class	I
Supply	230V
Control gear box	Current driver

**Lamp details**

Lamptype	LED 4000K
Wattage	15,6W
Gross luminous flux	2860
Luminaire power	17,2W
Number	1
Lifetime LED module	L80/B10 > 72000h
Color tolerance	MacAdam 3
CRI	>80

**Photometric details**

CIE Fluxcode	13 37 67 50 51
--------------	----------------

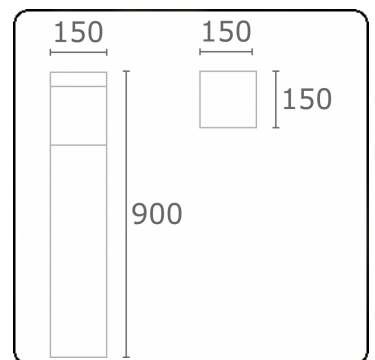

**ENERGY**

Verrijgbaar op aanvraag.

Disponible sur demande.

Available on request.

Auf Anfrage.

**WXYZ**  
kWh/1000h

**MULTILINE®**

2019/2015