

Rekta 20 - LRLB - 125mA DALI - RAL
07.42054364-9999

Fixture details

Mounting	Ceiling recessed
Light emission	Direct
Fitting cover	Louvre optic - black matt
Protection rate	IP 20
Housing	Aluminium
Finish	RAL colour at your choice
Certificates	CE, ISO 9001



Electric details

Protection class	I
Supply	230V
Control gear box	Current driver DALI/TD

Lamp details

Lamptype	LED 4000K
Wattage	5,0W
Gross luminous flux	5580
Luminaire power	33,0W
Number	6
Lifetime LED module	L90/B50 > 50000h
Color tolerance	MacAdam 3
CRI	>80

Photometric details


UGR	<19
CIE Fluxcode	99 99 100 99 81

Dimensions

A	1683 mm
---	---------

Remarks

LRLB optiek - 125mA DALI - RAL

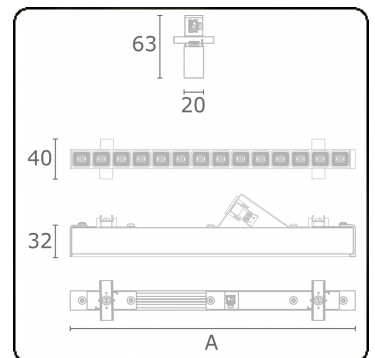

ENERGY

Verkrijgbaar op aanvraag.

Disponible sur demande.

Available on request.

Auf Anfrage.

MULTILINE®

WXYZ
kWh/1000h

2019/2015