

Grip T1 - Direct - satiné - 100mA - RAL
05.43004294-9999

Fixture details

Mounting	Ceiling
Light emission	Direct
Fitting cover	satin diffusor
Protection rate	IP 20
Housing	Aluminium
Finish	RAL colour at your choice
Certificates	CE, ISO 9001



Electric details

Protection class	I
Supply	230V
Control gear box	Current driver DALI/TD

Lamp details

Lamptype	LED 4000K
Wattage	4,0W
Gross luminous flux	6795
Luminaire power	39,6W
Number	9
Lifetime LED module	L90/B50 > 50000h
Color tolerance	MacAdam 3
CRI	>80

Photometric details



UGR	>19
CIE Fluxcode	50 80 96 99 66

Dimensions

A	2530 mm
B	2210 mm

Remarks

Ceiling

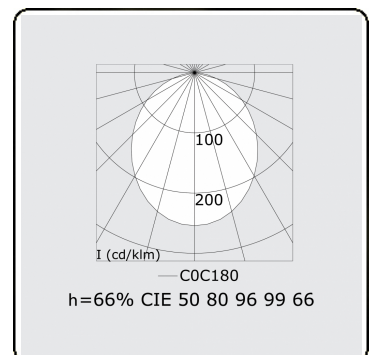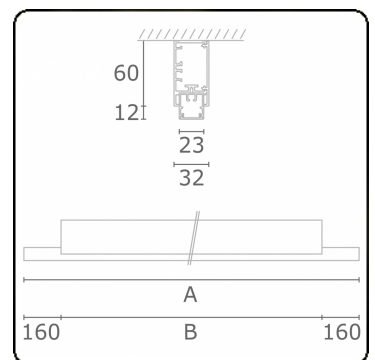

ENERGY

Verkrijgbaar op aanvraag.

Disponible sur demande.

Available on request.

Auf Anfrage.

WXYZ
kWh/1000h

MULTILINE®

2019/2015