

Gardo-2
35.01293-7916

Fixture details

Mounting	Ground
Light emission	Direct
Fitting cover	Glass
Protection rate	IP 54
Housing	Aluminium
Finish	RAL 7016 anthracite textured
Certificates	CE, ISO 9001

Electric details


Protection class	I
Supply	230V
Control gear box	Current driver

Lamp details

Lamptype	LED 3000K
Wattage	24W
Gross luminous flux	4880
Luminaire power	2x29W
Number	2
Lifetime LED module	L80/B10 = 50000h
Color tolerance	MacAdam 3
CRI	85

Photometric details

CIE Fluxcode	53 83 97 99 73
--------------	----------------

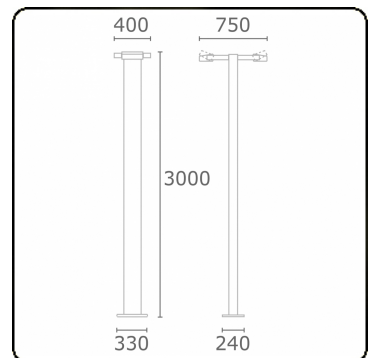

Remarks

including connection door with fuse - TC-D and LED with sandblasted glass, other light sources with clear glass

ENERGY

A ▶
 Verkrijgbaar op aanvraag.
B ▶
 Disponible sur demande.
C ▶
D ▶
 Available on request.
E ▶
F ▶
 Auf Anfrage.
G ▶

WXYZ
kWh/1000h

MULTILINE® 2019/2015